

ES V8 Air/Water Heat Pumps

AWST-R32-M 6, 9, 12 & 15 kW Monobloc Series


Economic and effective air-to-water heat pump, designed for a Nordic climate

- 6, 9, 12 and 15 kW heating capacity
- 250-liter domestic hot water storage tank
- A+++ heating efficiency
- User-friendly touch display
- Internet connectivity, monitor your heating through your mobile
- Two different temperature zones
- Automatic restart in case of power failure
- Operates in conditions down to -30°C
- Short payback time
- Low noise outdoor unit
- Anti-freeze protection device
- Monobloc, no F-gas certification required
- Built in backup heater for heating/hot water



User-friendly touch screen interface

The interface enables quick adjustment of all temperature settings directly from the front page. The software also supports variable temperature settings (curve) for both heating and cooling.

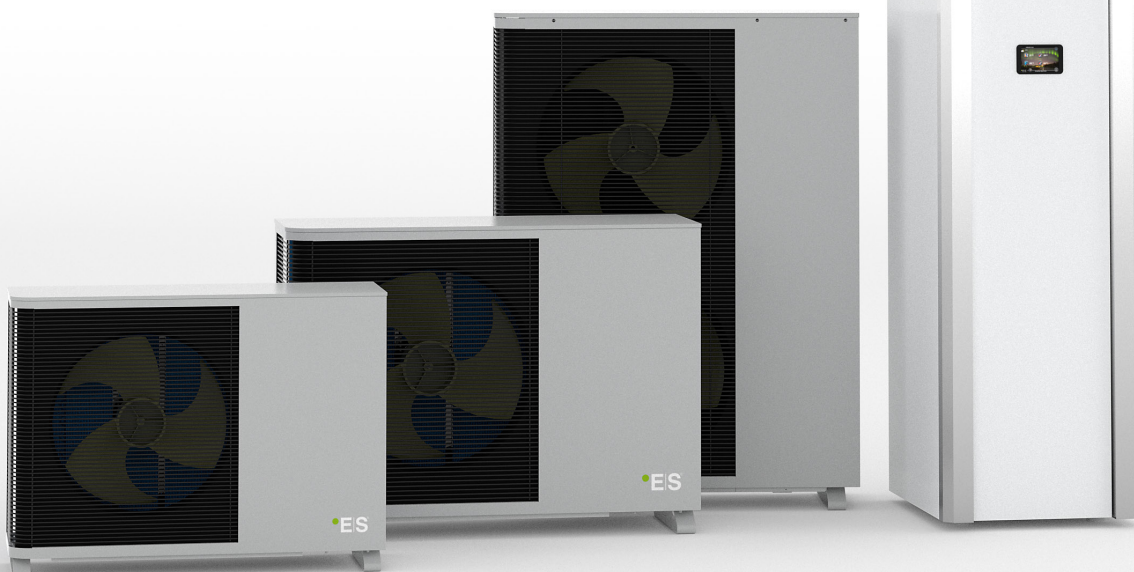

ES V8 Air/Water Heat Pumps

AWST-R32-M 6, 9, 12 & 15 kW Monobloc Series

ES Air/Water heat pumps monobloc AWST-R32-M- series converts energy from the outdoor air to heat and domestic hot water. By utilizing the energy from outdoor air, you can reduce your energy bills in an eco-friendly way. AWST-R32-M is designed to replace or supplement an existing heat source or for new installations and will typically reduce your energy consumption from 60–80%. The indoor unit has a stylish design to fit into a modern home. All connections are easily accessible at the top of the unit. Provides maximum energy savings and quiet operation. All AW-R32-M series are rated A+++ when used in low temperature systems and A++ in high temperature systems.

Control system

The unit is a complete heating/cooling/hot water central within 60x65 cm floor area. The built-in 250 liter tank provides enough

hot water for most households. Large tap profile and high efficiency reduces the cost of a shower by 60–70%. It has safety valve kit, 11 liter expansion, power full class A water pump that can run most villa heating systems, thermostatic hot water mixing valve. Weather compensated water temperature setting combined with internal room sensor provides you with all needed temperature control suitable for most buildings.

Increase your savings

The control system automatically changes between operation mode based on your settings. You can optimize the running based on your household logistics, like store more hot water when electricity prices are low, lower the temperature when no one are home in different periods every day, 7 days a week. It is also preserved for utility operation from your network provider, that can control the

heat pump and balance the available power in the network.

Simple and cost-effective installation

A monobloc system has a closed refrigerant circuit and a heat exchanger. The outdoor unit can be connected directly to the heating system – no refrigeration technicians needed during installation. The automatic and self-learning defrost function, combined with the nanocoated evaporator, reduces defrosting time to a minimum and increases the efficiency. Different heating systems require different temperatures, e.g. floor heating and radiators. AWST-R32-M have the possibility to set two heating curves if you have two different heating systems in your home. If the temperature drops, the heat pump changes the operating status and starts the production of hot water. If additional power is required, the integrated electric heaters will be used as back-up.

| | Unit | AWST6 – R32M | AWST9 – R32M | AWST12 – R32M | AWST15 – R32M |
|--|-----------|--|---------------------|---------------------|-------------------|
| Article number (indoor/outdoor unit) | | 120316/120317 | 120316/120318 | -120316/120319 | 120316/120320 |
| ErP Energy efficiency class | | A+++ / A++ | A+++ / A++ | A+++ / A++ | A+++ / A++ |
| SCOP 35°C (floor heating) EN 14825 | | 4,74 | 4,73 | 4,71 | 4,98 |
| Tap water profile | | L/A+ | | | |
| HEATING MODE (A7/W35) | | | | | |
| Heating capacity* | kW | 3,50 – 6,50 | 4,30 – 9,20 | 5,50 – 11,60 | 6,00 – 15,30 |
| COP max - Coefficient of Performance* | W/W | 4,70 | 4,71 | 4,90 | 5,06 |
| Rated input power* | kW | 0,75 – 1,41 | 0,92 – 2,10 | 1,10 – 2,68 | 1,22 – 3,20 |
| Max. temperature of heating water | °C | 58 | | | |
| Operating range heating | °C | -30 to +45 | | | |
| DHW TANK | | | | | |
| Type | | SUS316 Steel, DHW storage type | | | |
| Volume | l | 250 | | | |
| COOLING MODE | | | | | |
| Cooling capacity** | kW | 6,22 – 7,45 | 6,70 – 9,50 | 7,00 – 9,80 | 7,20 – 18,50 |
| EER max – Energy Efficiency Ratio** | | 4,45 | 4,60 | 3,80 | 5,42 |
| Min. temperature of cooling water | °C | 7 | | | |
| Operating range cooling | °C | 0 to +65 | | | |
| POWER SUPPLY – SPECIFICATIONS | | | | | |
| Outdoor unit | V/ph/fuse | 230V / 1-ph / 10A/C | 230V / 1-ph / 16A/C | 400V / 3-ph / 16A/C | |
| Indoor unit + electric flow heater | V/ph/fuse | 230V / 3-ph / 25A/C or 400V / 3-ph / 16A/C | | | |
| Anti freeze protection outdoor | V/ph/fuse | 230V / 1-ph / 6A/C | | | |
| REFRIGERANT SPECIFICATION | | | | | |
| Type / Mass of refrigerant | kg | R32 / 0,90 | R32 / 1,40 | R32 / 1,80 | R32 / 2,55 |
| Type of connection between indoor-outdoor unit | | Hydraulic connection | | | |
| Dimensions of refrigerant pipes connectors | | G1" | | | G1-1/4" |
| SOUND POWER AND SOUND PRESSURE LEVEL | | | | | |
| Sound power level LwA - Indoor unit | dB(A) | 44 | 45 | 45 | 45 |
| Sound power level LwA - Outdoor unit*** | dB(A) | 52 | 53 | 52 | 58 |
| NET DIMENSIONS | | | | | |
| Indoor unit (WxHxD) | mm | 600 x 1780 x 680 | | | |
| Outdoor unit (WxHxD) | mm | 1010 x 735 x 370 | 1165 x 885 x 370 | 1165 x 885 x 370 | 1085 x 1450 x 390 |
| NET WEIGHT | | | | | |
| Indoor unit / Outdoor unit | kg | 125 / 67 | 125 / 80 | 125 / 85 | 125 / 140 |

* Measured according to standard EN 14511. Heating condition: water inlet/outlet temperature 30°C/35°C, ambient temperature DB/WB 7°C/6°C. ** Measured according to standard EN 14511. Cooling condition: water inlet/outlet temperature 18°C and ambient temperature 35°C. *** Measured according to standard EN 12102.

ES ENERGY SAVE AB

Nitgatan 2, 441 38 Alingsås · Sweden
0046 322-790 50 · info@energysave.se · www.energysave.se

EIS ENERGY SAVE